




PU225

Válvula Solenoide 2/2 Vías

Serie PU225

AKME
SOLUÇÕES EM AUTOMATIZAÇÃO



Codificación

PU225	15	AC220V
I	I	I
Codificación	Rosca	Tensión
PU225: Válvula solenoide 2/2 Vías	10: G3/8"	AC220V
	15: G1/2"	AC110V
	20: G3/4"	DC12V
	25: G1"	DC24V
	35: G1 1/4"	
	40: G1 1/2"	
	50: G2"	

Especificación


Modelo	PU225-10	PU225-15	PU225-20	PU225-25	PU225-35	PU225-40	PU225-50
Fluido	Aire, agua, aceite						
Tipo	Normalmente cerrada						
Apertura de caudal (mm)	13	13	25	25	38	38	50
Caudal (l/min)	4428	4428	11808	11808	21648	29520	47232
Rosca	G3/8"	G1/2"	G3/4"	G1"	G1 1/4"	G1 1/2"	G2"
Viscosidad del fluido para operación	Por debajo de 50 CST						
Presión de trabajo	0.05~1.0MPa						
Resistencia máxima de presión	1.5MPa						
Rango operativo de temperatura	-5~+80°C						
Material del cuerpo	Latón o acero						

Serie PU225

Válvula Solenoide 2/2 Vías

Dimensión general

Serie PU225

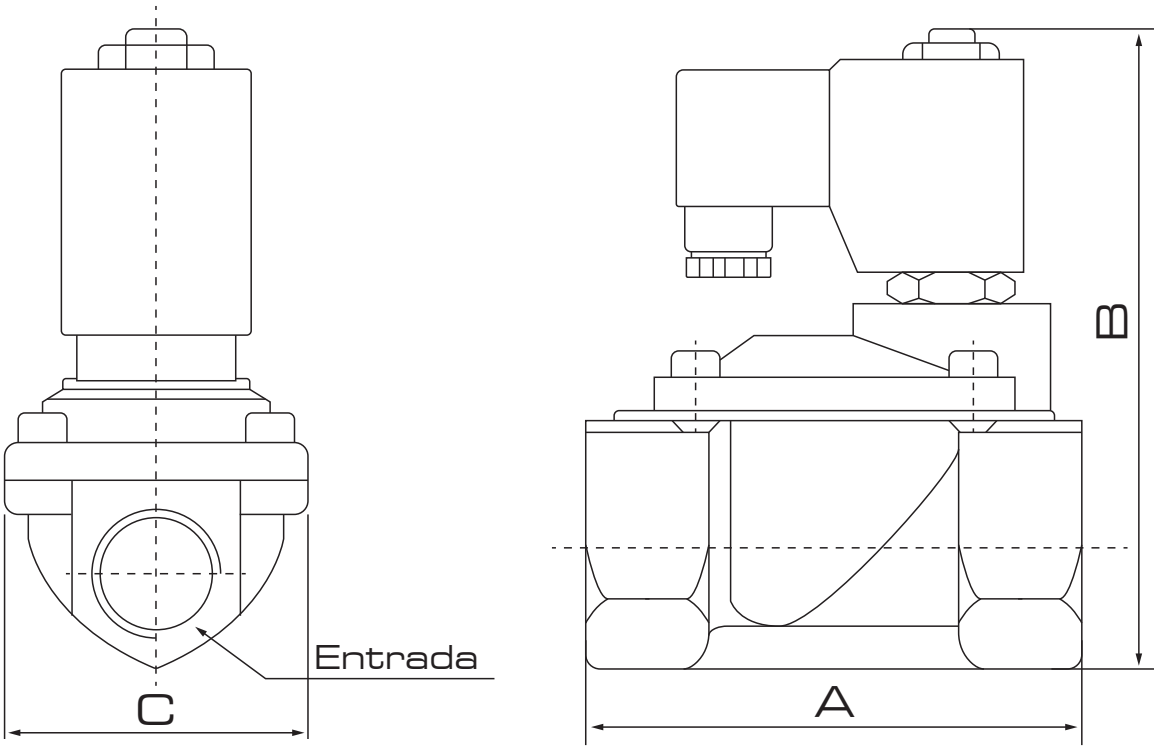

Dimensiones

Modelo	Rosca	A	B	C
PU225-10	G3/8"	66.5	106.5	48
PU225-15	G1/2"	66.5	106.5	48
PU225-20	G3/4"	72	113	58
PU225-25	G1"	96	121	70
PU225-35	G1 1/4"	128	145.5	96
PU225-40	G1 1/2"	128	145.5	96
PU225-50	G2"	161	160.5	112